

General Features




- Device power supplied via DALI line
- Independent configuration for each button
- Different color options
- Available in 1 to 12 buttons (6 folds) configurations
- Easy mount into 60x60 mm standard switch junction boxes
- Optional status LEDs
- Compatible with following DALI-2 standards
 - Control device (IEC 62386-103)
 - Push button (IEC 62386-301)
 - Status feedback (IEC 62386-332)

Technical Data

Type of protection	IP 20	EN 60 529
Safety class	II	EN 61 140
Operating Voltage	- Voltage	12V... 22V DC, via DALI bus
	- Current drawn from bus	<7mA (guaranteed by design)
Connections	- DALI	Terminal Connection
Operating Temperature	- Ambient	-5° C + 45° C
	- Storage	-25° C + 55° C
Humidity	- Max. Air humidity condensation	95% no moisture
Dimensions	Front Side	90 x 90 mm
	Side- Surface mounted part	8.5 mm
	Side- Flush mounted part	29.5 mm
Weight	73 g	
Box Material	Plastic, polycarbonate	
CE	In accordance with the EMC guideline and low voltage directive	

Functional Elements and Connections

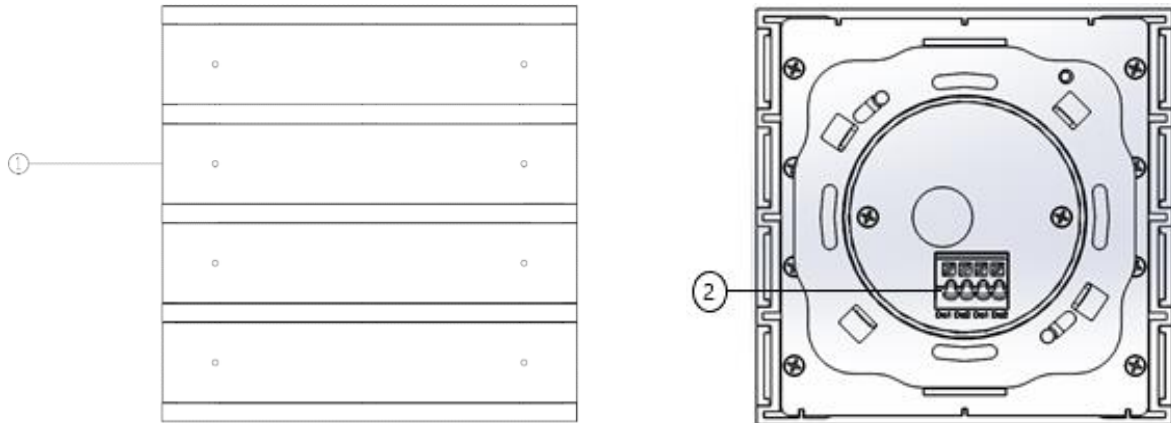

1. Button groups (1-6 fold) (extendable to 6 folds)
2. DALI terminal inputs

Technical Drawings

