



Device Description


The Mona series DND MUR display, where you can easily see whether your guests are in the room, consists of a glass touch screen and includes room number, hotel logo, occupancy, Do Not Disturb, Make Up Room indicators and doorbell button.

- Monoblock glass design
- Customizable Logo
- Built-in touch buzzer button
- Suitable for flush mounting
- Device is powered by KNX
- Physical KNX Doorbell output

- 2 x Relay Output
- Colourful LED Indicators
- The occupancy information is taken from KNX

Operation and Display

| Front Side | Back Side |
|------------------|----------------------------------|
| 1- Logo | 1- KNX Bus |
| 2- Room No | 2- Physical address prog. button |
| 3- Buzzer Button | 3- Physical address prog. LED |
| 4- MUR Indicator | 4- 30V DC (KNX AUX) |
| 5- Occupancy LED | |
| 6- DND Indicator | |

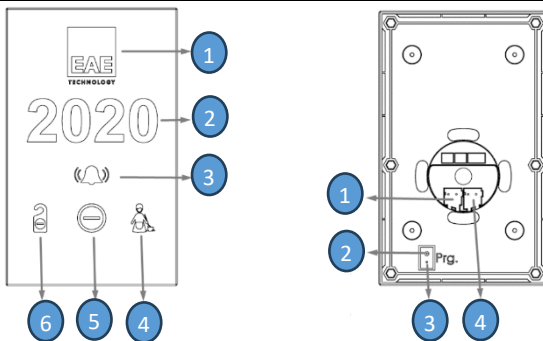


Technical Data

| | | |
|------------------------------|--|--|
| Protection Type | IP20 (IP65 optional) | EN 60529 |
| Safety Rating | II | EN 61140 |
| Connections | KNX Bus KNX AUX | Bus Terminal AUX Terminal |
| Power Supply | Voltage Current drawn from KNX bus Current drawn from KNX aux | 21V... 30V DC, KNX < 10 mA < 60 mA |
| Operating Elements | LED (red) LED (RGB) | Addr Prog. LED Status LEDs |
| Operating Temperature | Ambient | -5° C + 45° C |
| Humidity | Max. Air Humidity | 95% no moisture |
| Dimensions | Front Side Side- Surface mounted part Side- Flush mounted part | 120 x 195 mm 13,2 mm 20.8 mm |
| Box Material | Surface : Glass Flush Mounted Part : Polycarbonate | |
| Color | Surface : Black or White Flush Mounted Part : Black | |
| CE | In accordance with the EMC guideline and low voltage directives | |

Installation

Installation of the product is done with metal flange. It is fixed to the junction box by using screws. The switch has magnets and should be positioned buttons downwards. The device will stick on flange by magnetization.

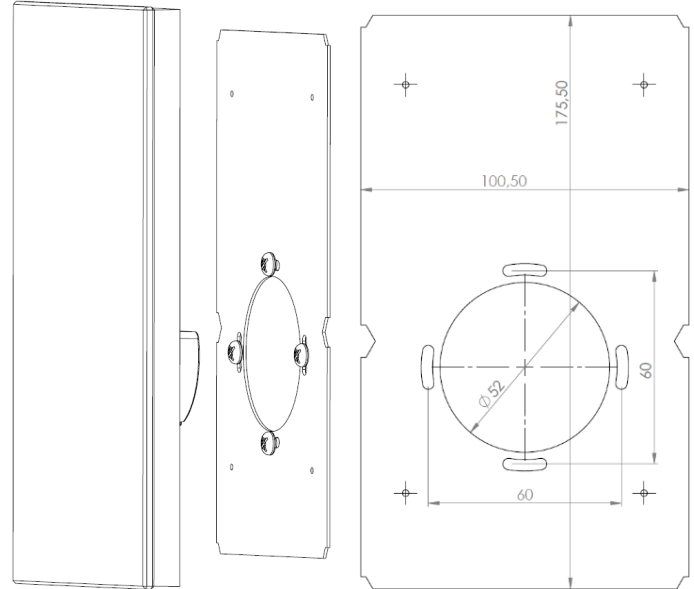

Commissioning

Device default physical address is 15.15.255. Determination of the physical address and setting of parameters are actualized with Engineering Tool Software (ETS4 or higher). "knxprod" file must be imported to the ETS. (<http://www.eaetechnology.com/>)

i A detailed information about parameter configuration can be found in Product Manual of device.

! Installation and commissioning of device may only be implemented by trained electricians. The relevant standards, directives, regulations and instructions must be observed when planning and implementing the electrical installation.

-Protect the device against moisture, dirt and damage during transport, storage and operation!

-Do not operate the device out of the specified technical data which is stated.

-The device may only be operated in closed enclosures (Distribution boards)

Cleaning

If device becomes dirty, only a dry cloth can be used for cleaning. It is not suitable to use wet cloths, caustics and solvents.