

### Device Description

EAE KNX Universal Dimmer Actuator has dimming functions which can be used by phase dimming only. The device can be operated manually via push button over enclosure. Each channel can be programmed via ETS5. UD106 has 6 independent channels and 3 channel grouping features. Channel features of dimming actuator;

- Staircase lighting
- Forced Operation
- Channel Grouping (merging outputs for high power lamps)
- Scene Function
- Electrical Measurements (Voltage)
- Error Detection (Load Error, Short-Circuit, Over-current, Over-voltage, Under-voltage, Over-heating)

All features can be used individually or together.

### Technical Data

<b>Protection Type</b>	IP 20	EN 60 529
<b>Safety class</b>	II	EN 61 140
<b>KNX Power supply</b>	Voltage	21V... 30V DC, SELV
	Current consumption	< 10 mA
<b>Mains Supply</b>	Min...Max	185... 300V AC
	Screw terminals	0,5...3,31 mm <sup>2</sup> solid and stranded wire
		0,5...3,31 mm <sup>2</sup> stranded wire with ferrule 0.5 Nm
<b>Connections</b>	Max. tightening torque	0.5 Nm
	KNX	Bus connection terminal
	Switching & Dimming	6 outputs, Trailing and Leading-Edge Dimming
	Cable length	Max. 200 meters
	Max. switching power	300 VA per channel 300 W halogen, incandescent lamps per channel 300 W Inductive transformers per channel 250 W Phase-cut dimmable LED lamps per channel 120 W constant voltage drivers Multiplying the output power by parallel connection of channels.
<b>Output</b>	Min switching power	9 W
	Mechanical Life	Lifetime
<b>Type of contact</b>	Electronically controlled	
<b>Installation</b>	35mm mounting rail	EN 60 715
<b>Operating elements</b>	LED (red) and button	For physical address programming
	On/Off Button	For Switching/Dimming lights
<b>Temperature range</b>	Ambient	-5° C + 45° C
	Storage	-25° C + 55° C
<b>Humidity</b>	Max. air humidity	85 % no moisture condensation
<b>Dimensions</b>	L x W x H	66 x 180 x 90 mm
	Width in units	10 modules
	(18 mm modules)	
<b>Box</b>	Plastic, polycarbonate, colour grey	
<b>CE</b>	In accordance with the EMC guideline and LV directives	
<b>Electrical Installations</b>	EN 60 669-2-1	
<b>EMC requirements</b>	EN 63 044-5-2	

### Operation and Display


#### -Programming Led<sup>(3)</sup>

Red led lights up after the programming button is pressed.

#### -Status Leds



Blinks when error occurred, Stays when switched ON.

### Connection Example

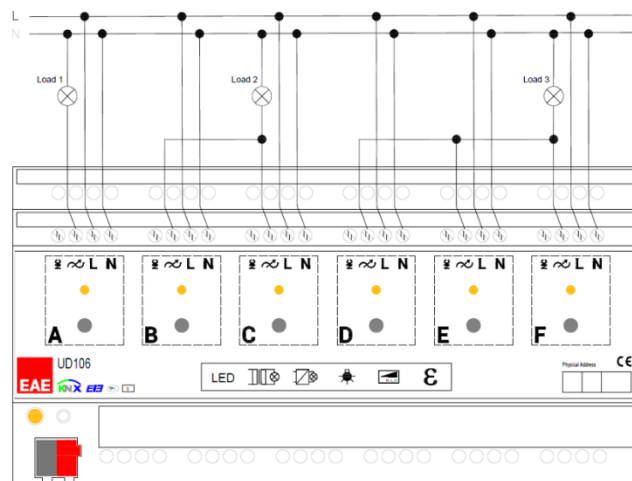

Single and Grouped Channel Control

### Scale Drawings

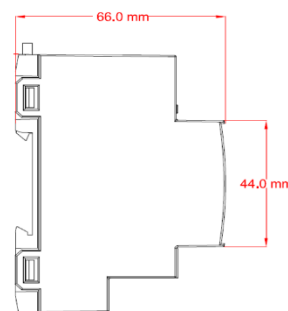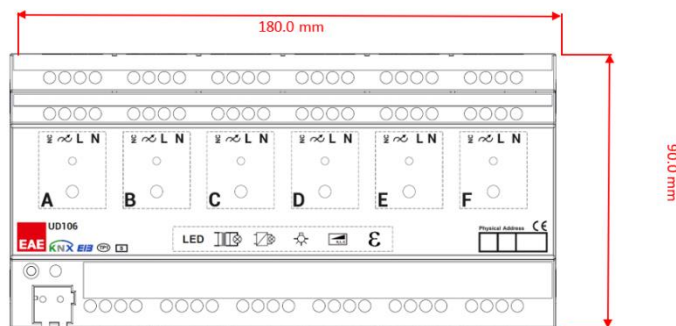

### Commissioning

Determination of the physical address and setting of parameters are actualized with Engineering Tool Software (ETS5 or higher). ".knxprod" file must be imported to the ETS. Please check website for latest ".knxprod" file. [www.eaetechnology.com](http://www.eaetechnology.com)

**i** A detailed information about parameter configuration can be found in Product Manual of device.

**!** Installation and commissioning of device may only be implemented by trained electricians. The relevant standards, directives, regulations and instructions must be observed when planning and implementing the electrical installation.

- When connecting the device make sure that the device is isolated!
- Protect the device against moisture, dirt and damage during transport, storage and operation!
- Do not operate the device out of the specified technical data which is stated.
- The device may only be operated in closed enclosures (Distribution boards etc.)

### Cleaning

If device becomes dirty, only a dry cloth can be used for cleaning. It is not suitable to use wet cloths, caustics and solvents.