


Miola Touch Panel 10"


EAE KNX Touch Panel 10" Quick Start Guide

2. Connect cables to related connectors


⚠ Switch off mains voltage
before connecting cables

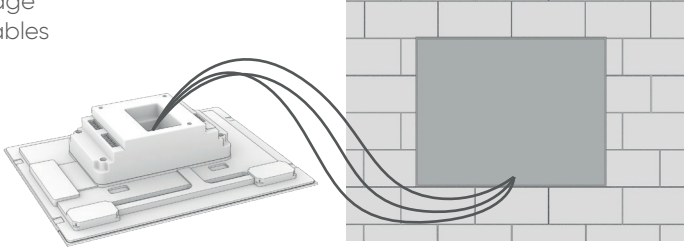

3. Adjust Magnets for perfect fit

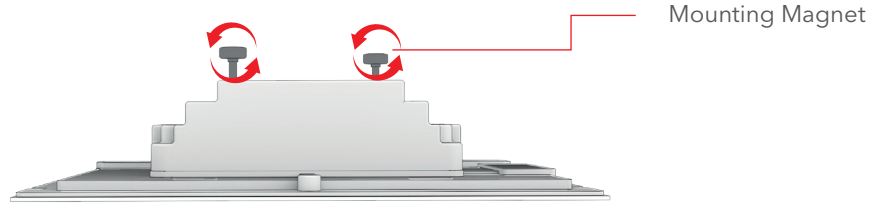

4. Mount Touch Panel

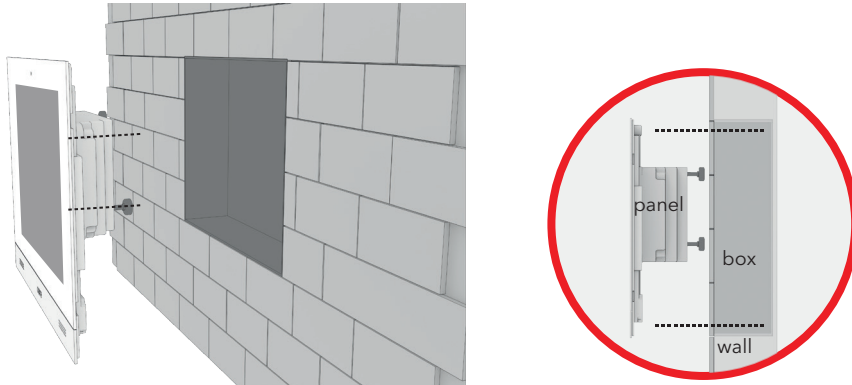

Miola Touch Panel 10"

EAE KNX Touch Panel 10" Quick Start Guide

All you need is EAE





Miola Touch Panel 10" EAE KNX Touch Panel 10" Quick Start Guide

PRODUCT OVERVIEW


Miola Touch Panel is designed as all-in-one controller to meet needs for residential buildings. It works as smart home controller and monitoring panel, SIP Intercom Indoor Panel and Security Panel in today's and tomorrow's smart homes.

Smart Home Controller: Touch Panel can be connected to multiple interfaces to control and monitor smart devices from different protocols.


Intercom Indoor Panel: It is compatible with SIP Protocol which is mostly used communication protocol in IP intercom system. Thus Touch Panel can work as indoor Intercom Panel in SIP Intercom Networks.

Security Panel: Touch Panel has built-in digital inputs which can be connected to security sensors. Then Touch Panel can work as security panel to satisfy basic needs for security solutions.

FRONT VIEW

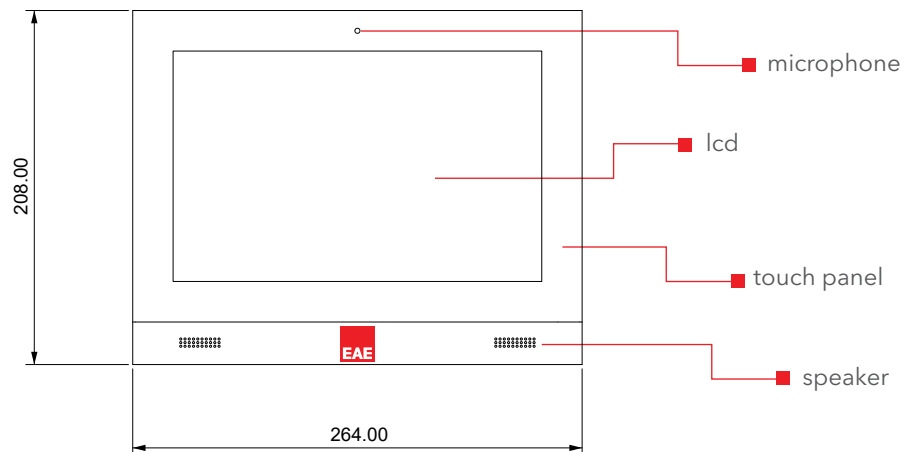


TOP VIEW

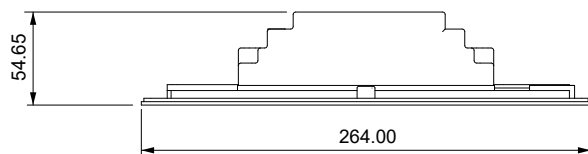

Miola Touch Panel 10" EAE KNX Touch Panel 10" Quick Start Guide

REAR VIEW

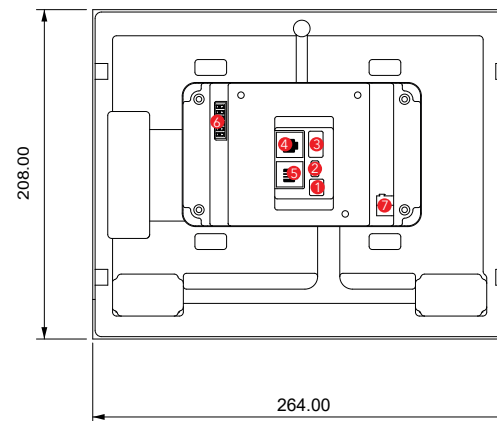

1. Power Supply: 12V- 30V DC
2. USB Mini: Reserved for debugging
3. USB-C: Reserved for programming
4. ETH0: Building network. Connection to intercom clients, smart devices and internet access in building.
5. ETH1: Home network. Connection to smart devices, intercom clients and internet access at home
6. Inputs (I1-I5): Digital Inputs
7. KNX: Connection to KNX-TP bus line

Note: Miola Touch Panel is able to connect to two different IP networks at the same time. This feature allows to isolate home and building networks in buildings.

CONFIGURATION

Touch Panel is configured via built-in web interface. It has dual Ethernet network interfaces which use DHCP by default.

- Connect Touch Panel to a network that has DHCP server via home or building network.
- Go to Settings in Touch Panel user interface and then get IP address of Touch Panel.
- Enter IP address to web-browser, then enter username and password
- Default username: EAEAdmin Default password: EAE1234
- If you need support in further steps, visit www.eaetechnology.com and check Miola Product Manual.



INSTALLATION

1. Insert Miola Touch Panel 10" Mounting Box

- ⚠ Mounting Box should be aligned vertically
- ⚠ Mounting Box sold separately.

Mounting Box dimensions:
189mm x 250mm x 60mm

